


## 2/2-way proportional valve




- High sensitivity
- 0 to 362 PSI
- DN 2 to 8 mm
- 3/8" and 1/2"

Type 2835 can be combined with...

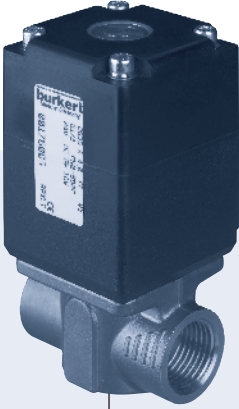


**Type 8605**

Digital control electronics  
Cable plug version




**Type 8605**

Digital control electronics  
DIN-rail version



**Type 2508**

Cable plug




**Type 8611**

Universal controller

The direct-acting proportional valve Type 2835 can be used as a control valve for process control and is suitable for technical vacuum. Low hysteresis, high repeatability and high sensitivity ensure superior regulation behavior. Thanks to an elastomeric sealing, the valve closes tightly and securely.

### Circuit function A



Direct acting 2-way  
proportional valve,  
normally closed

Valve control takes place through the control electronics of Type 8605, which converts an analogue input signal into a PWM signal<sup>1)</sup>.

Further, functional features of the Type 8605 electronic control unit:


- Temperature compensation for coil heating by internal current regulation
- Simple zero and span settings
- Ramp function to dampen fast status changes

Technical Data - valve	
<b>Body material</b>	Brass, Stainless steel
<b>Seal material</b>	FKM, EPDM on request
<b>Media</b>	Neutral gases, liquids
<b>Medium temperature</b>	14°F to 194°F (-10°C to +90°C)
<b>Ambient temperature</b>	max. 131°F (+55°C)
<b>Viscosity</b>	max. 21 cSt
<b>Operating voltage</b>	24 V DC
<b>Power consumption</b>	16 W
<b>Duty cycle</b>	100 % continuously rated
<b>Port connection</b>	NPT 3/8, NPT 1/2, G 3/8, G 1/2
<b>Electric connection</b>	Cable plug (DIN EN 175301-803 Form A)
<b>Installation</b>	As required, preferably with actuator in upright position
<b>Typical control data<sup>2)</sup></b>	
Hysteresis	< 5 %
Repeatability	< 0,25 % v. F.S.
Sensitivity	< 0,25 % v. F.S.
Turn-down ratio	1:100
<b>Protection class - valve</b>	IP65


<sup>1)</sup> PWM pulse-width modulation

<sup>2)</sup> Characteristic data of control behaviour depends on process conditions

Dimensions [mm]

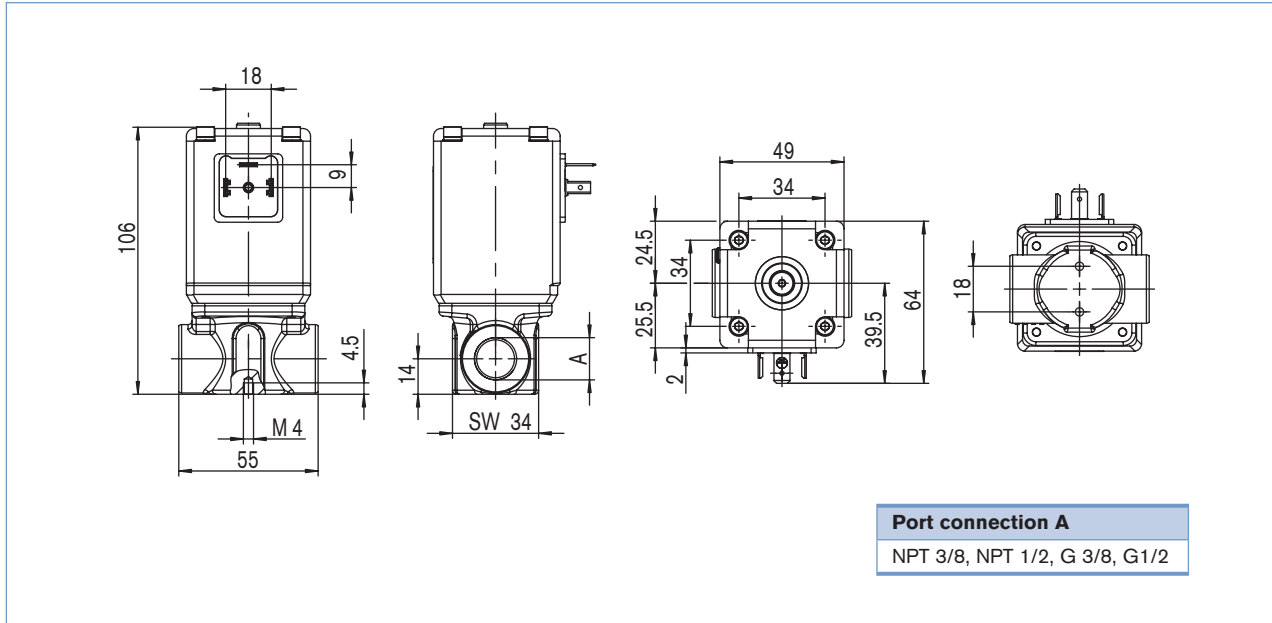

Characteristics of a proportional valve

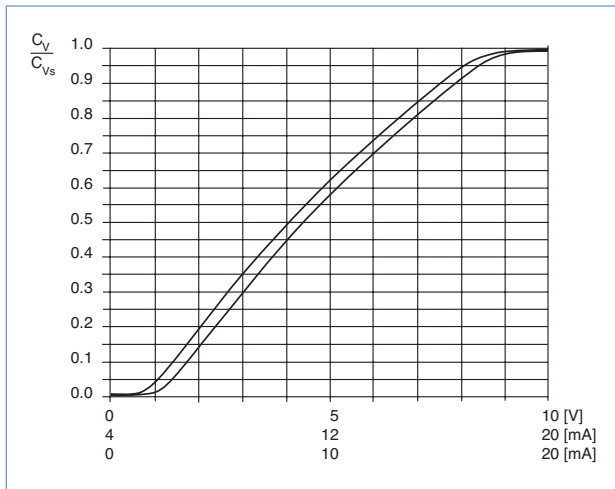

Advice for valve sizing

In continuous flow applications, the choice of appropriate valve size is much more important than with on/off valves. The optimum size should be selected such that the resulting flow in the system is not unnecessarily reduced by the valve. However, a sufficient part of the pressure drop should be taken across the valve even when it is fully opened.

**Recommended value:  $\Delta p_{\text{valve}} > 30\%$  of total pressure drop within the system**

**For that reason take advantage of Bürkert competent engineering services during the planning phase!**


Determination of the  $C_v$  value

Pressure drops	$C_v$ value for liquids [GPM]	$C_v$ value for air and gasses [SCFM]
Subcritical ( $p_2 > p_1 \times .53$ )	$C_v = \frac{Q_l \sqrt{Sg}}{\sqrt{\Delta p}}$	$C_v = \frac{Q_g \sqrt{Sg}}{\sqrt{\Delta p \times p_2}}$
Supercritical ( $p_2 < p_1 \times .53$ )	$C_v = \frac{Q_l \sqrt{Sg}}{\sqrt{\Delta p}}$	$C_v = \frac{Q_g \times 2 \sqrt{Sg}}{p_1}$

- $C_v$  = Liquids – flow coefficient in GPM at 1 PSI  $\Delta p$   
Gasses – flow coefficient in SCFM for each PSIG of inlet pressure
- $Sg$  = Specific gravity (Specific gravity of air and water @ 60°F= 1)
- $p_1$  = Inlet pressure in PSIA
- $p_2$  = Outlet pressure in PSIA
- $\Delta p$  = Differential pressure ( $p_1 - p_2$ )
- PSIA = Gauge pressure (PSIG) + 14.7
- $Q_l$  = Liquid flow in GPM
- $Q_g$  = Gas flow in SCFM

## Ordering chart for valves

### All valves with FKM sealing

Circuit function	Orifice [mm]	Port connection	C <sub>vs</sub> value water [GPM] <sup>1)</sup>	Q <sub>Nn</sub> value [l/min] <sup>2)</sup>	Maximum pressure [PSI] <sup>3)</sup>	Coil power consumption [W]	Maximum coil current [mA]	Item no. Brass body	Item no. Stainless steel body
A 2/2-way normally closed (NC) 	2 <sup>4)</sup>	G 3/8	0.14	129	362.5	16	750	175 980	175 996
		NPT 3/8	0.14	129	362.5	16	750	175 997	175 998
	3	G 3/8	0.29	270	145	16	750	175 999	176 000
		NPT 3/8	0.29	270	145	16	750	176 001	176 002
	4	G 3/8	0.52	485	116	16	750	176 003	176 004
		NPT 3/8	0.52	485	116	16	750	175 995	175 984
		G 1/2	0.52	485	116	16	750	176 005	175 006
	6	NPT 1/2	0.52	485	116	16	750	175 985	175 986
		G 1/2	0.93	862	58	16	750	175 989	175 990
	8	NPT 1/2	0.93	862	58	16	750	175 993	175 994
		G 1/2	1.28	1186	29	16	750	178 794	179 412
			NPT 1/2	1.28	1186	29	16	750	179 305

<sup>1)</sup> C<sub>vs</sub> value: Flow rate value for water, measured at 68°F (+20°C) and 1 PSI pressure differential over a fully opened valve.

<sup>2)</sup> Q<sub>Nn</sub> value: Flow rate value for air with inlet pressure of 87 PSI<sup>1)</sup>, 14.5 PSI pressure differential and 68°F (+20°C).

<sup>3)</sup> Pressure data [PSI]: Overpressure with respect to atmospheric pressure.

<sup>4)</sup> For Δp > 145 PSI it is possible to get inconsistencies in the characteristic curve because of flow conditions in the application.

**Please note** that the valves are delivered without control electronics unit and cable plug (see accessories below).

### Further versions on request



#### Materials

Seal: FFKM (resistant to aggressive media), EPDM



#### Analytical

Oxygen version  
Part oil-, fat- and silicon free



#### Electrical connection

12 V coil



#### Approvals

Ex version - II 2G EEx m IIC T4, PTB No. 02 ATEX 2094X with or without terminal box

## Ordering chart for accessories

### Cable plug Type 2508 according to DIN EN 175301-803 Form A

The delivery of a cable plug includes the flat seal and fixing screw

Circuitry	Voltage / frequency	Item no.
None	0 - 250 V AC/DC	008 376
None, with 3 m cable	0 - 250 V AC/DC	783 573

### Electronic Control Type 8605

Please see Datasheet

**Note**

You can fill out the fields directly in the PDF file before printing out the form.

**Design data for proportional valves**

▶ Please fill out this form and send to your local Bürkert Sales Centre\* with your inquiry or order

Company	Contact person
Customer no.	Dept.
Address	Tel./Fax
Town / Postcode	E-Mail

<input type="checkbox"/> = Mandatory fields	<input type="text"/> Quantity	<input type="text"/> Desired delivery date
<b>Process data</b>		
<input type="checkbox"/> Medium	<input type="text"/>	
<input type="checkbox"/> State of medium	<input type="checkbox"/> liquid	<input type="checkbox"/> gaseous <input type="checkbox"/> vaporous
<input type="checkbox"/> Medium temperature	<input type="text"/> °F	
<input type="checkbox"/> Maximum flow rate	$Q_{nom} =$ <input type="text"/>	Unit: <input type="text"/>
<input type="checkbox"/> Minimum flow rate	$Q_{min} =$ <input type="text"/>	Unit: <input type="text"/>
<input type="checkbox"/> Inlet pressure at nominal operation	$p_1 =$ <input type="text"/>	PSIG
<input type="checkbox"/> Outlet pressure at nominal operation	$p_2 =$ <input type="text"/>	PSIG
<input type="checkbox"/> Maximum inlet pressure	$p_{1max} =$ <input type="text"/>	PSIG
<input type="checkbox"/> Ambient temperature	<input type="text"/> °F	
<b>Additional specifications</b>		
<input type="checkbox"/> Body material	<input type="checkbox"/> Brass	<input type="checkbox"/> Stainless steel
<input type="checkbox"/> Seal material	<input type="checkbox"/> FKM	<input type="checkbox"/> other <input type="text"/>

**Note** Please state all pressure values as **overpressures with** respect to atmospheric [PSIG].